



**ASSEMBLY INSTRUCTIONS** 

## **Platforms**


Stationary, Rolling

## **Assembly Instructions Overview**


Please read this brief overview before assembling your Hercke Series 7even system. What follows is an outline of the order in which your assembly process needs to occur.

A Phillips head No. 2 screwdriver is the only tool required to assemble Hercke® Series 7even® products. Depending on your installation requirements, other tools that may be helpful include a level, power drill and drill bits. Assemble all platforms. Place platform in the desired location. Level each platform and make sure all platforms are level together. Pull platform out allowing yourself room to get behind the platform. Assemble cases. Stack cases and drawers on platforms in a single stack. Add Single E-Clips to the backside of cases and drawers. Slide the stack back into their final level position. Assemble Overhead Storage Cases. Select overhead cabinet placement. Attach case using Wall Mount System or Channel Mount System. Fasten Single and Double E-Clips to adjoin cases and drawer modules. Snap door hinges to case hinge plates and adjust door positions. Attach work surface. Chaos Defeated. Order Restored.


## ADJUSTABLE STATIONARY PLATFORM

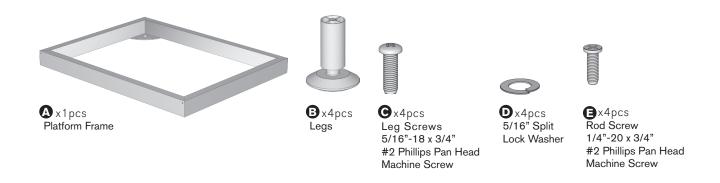

- A Assemble legs B
  - **B** Fasten legs **B** to platform frame **A** using parts **C** & **D** in the outer round hole as illustrated below.
  - C Insert screws into the holes on the sides of the platform frame. (These will later be used with E-Clips and Double E-Clips to secure cabinets to the platform.)

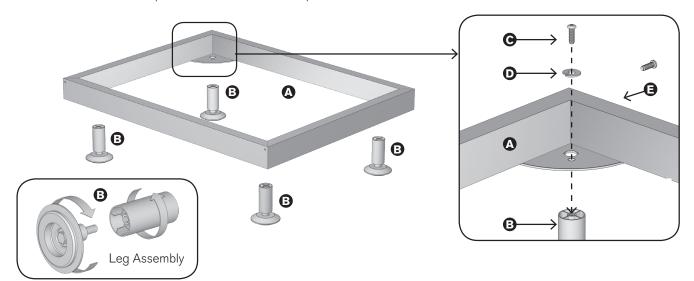

Rotate legs to adjust height and level platform.

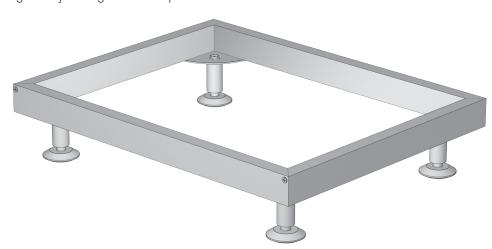

## LOCKING ROLLING PLATFORM







Bx2pcs Locking Caster



Tx1pcs Wrench



Gx4pcs Rod Screw 1/4"-20 x 3/4" #2 Phillips Pan Head Machine Screw




• x4pcs Hex Nut M12 x 1.75






A Fasten casters 3&6 to platform frame 4 using parts 5 as illustrated below. Make sure the caster posts are placed and seated in the hex hole. Place both rolling casters 6 on the back side of the platform and both of the locking casters 3 on the front side of the platform.

**B** Insert **©** screws into the holes on the sides of the platform frame. (These will later be used with E-Clips and Double E-Clips to secure cabinets to the platform.)

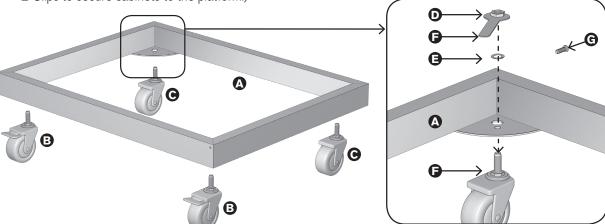



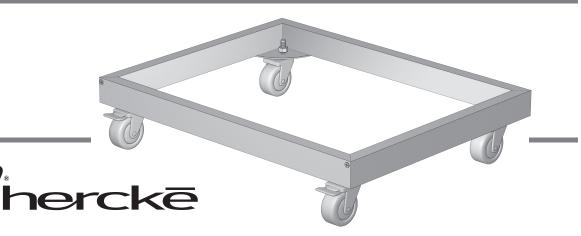

www.hercke.com | 855.344.2009

Please visit www.hercke.com for more information.